

PURITY™ FG Trolley Fluid



Introduction


Petro-Canada's PURITY FG Trolley Fluid is a food grade fluid used to lubricate hook and trolley systems in meat processing operations. PURITY FG Trolley Fluid is formulated to deliver tough protection and long service life.

PURITY FG Trolley Fluid's performance results from more than 30 years formulating experience. Using the HT Purity Process, Petro-Canada produces 99.9% crystal-clear base oils – among the purest in the world. Virtually free of impurities that can hinder fluid performance, these crystal clear base oils are fortified with a tenacious tackifier and specially selected anti-oxidant, anti-wear, anti-corrosion and lubricity additives.

The result is a food grade trolley fluid that protects against wear, rust and drips in the toughest meat processing conditions.

Unmatched Triple Protection

- **Wear Protection - extends trolley life, which can help to reduce downtime and maintenance costs**
 - Maintains full lubrication, even under heavy carcass loads
 - Special lubricity additive reduces bearing friction to prevent “sliders” – sluggish or sticking trolleys
 - Anti-wear additives provide tough protection from pin and bushing wear

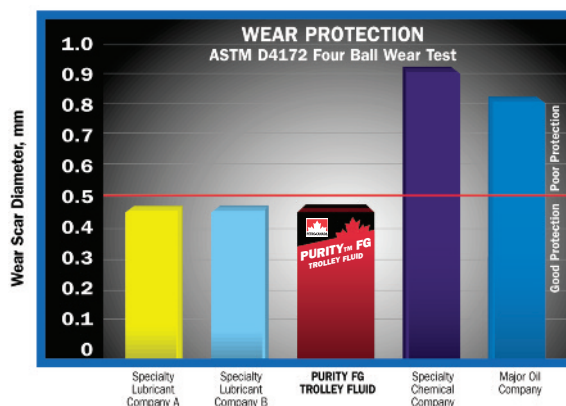

PURITY FG delivers tough wear protection. Less wear means fewer production upsets, which can lead to higher productivity and lower maintenance costs.

- **Corrosion Resistance - protects chains and trolleys from rust, even in the wettest operating conditions**
 - Strong anti-corrosion additives prevent corrosive wear, extending the life of chains and trolleys, reducing maintenance costs
 - Protects meat products from contact with rust particles and other metal oxides, reducing production wastage



PURITY FG **Specialty Chemical Company**

Unlike a leading chemical company's fluid, PURITY FG Trolley Fluid passes the demanding ASTM rust test (Sequence A & B). This strong level of corrosion protection can extend equipment life in the wettest operating conditions while protecting food products from rust contact.


What is the HT difference?

Petro-Canada starts with the HT purity process to produce water-white, 99.9% pure base oils. The result is a range of lubricants, specialty fluids and greases that deliver maximum performance for our customers.



- **Drip Protection - protects meat products from fluid contact**

- Formulated with a special tackifier that strongly adheres to metal surfaces
- Tenacious resistance to fluid drips and throw-off from chains
- Protects meat products from fluid drip contamination, reducing production wastage

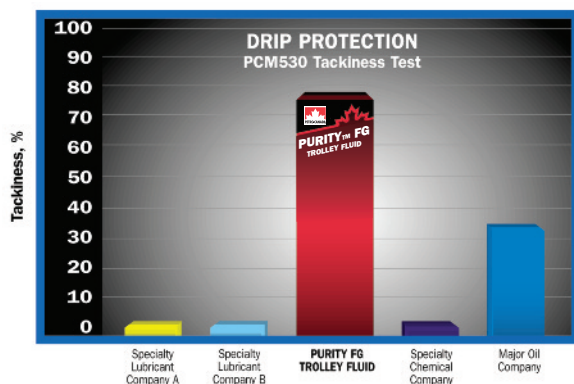

The tackiest among these competitive fluids tested, **PURITY FG Trolley Fluid's** tenacious adherence to metal surfaces better protects food from fluid drips and throw-off from chains.

- **Remains fluid at low temperatures**

- Ensures proper lubrication and smooth, uninterrupted trolley operation in chilled storage and low temperature production areas

- **Highly resistant to foaming and air entrapment**

- Protects pumps from fluid starvation and cavitation in centralized lubrication systems
- Storage tanks can be filled quickly and easily without interruption

- **Tasteless, odourless and non-staining**

- Wipes up quickly and effectively in the event of incidental contact with meat products

- **Fully registered for use in and around food processing operations**

- H1 registered by NSF
- All fluid components comply with FDA 21 CFR 178.3570 "Lubricants with incidental food contact"
- Certified Kosher Pareve by Star K
- Fits perfectly in HACCP (Hazard Analysis and Critical Control Point) and GMP (Good Manufacturing Practice) plans

More Product Advantages

- **Trolleys clean up quickly and effectively**

- Reacts quickly with caustic washing solutions to form a detergent that aids in the removal of residual fats, oils and other residues
- Balanced fluid acidity protects against rapid depletion of caustic chemical cleaning solutions

- **Highly stable when heated and exposed to water - extends fluid life in heated storage tanks**

- Exceptional thermal stability, oxidation stability, and hydrolytic stability
- Allows fluid heating, without compromise to fluid life or performance
- Rapidly separates from water and does not form emulsions or sludge in oil-water bath systems
- Reduces fluid consumption and system cleaning expenses



Nonfood Compounds
Program Listed H1

ISO 21469 Certified

Applications

PURITY FG Trolley Fluid is recommended for lubricating hook and trolley systems in meat processing operations. It can also be used as a low viscosity lubricating fluid for chains and conveyors, and as a rust protective oil.

PURITY FG Trolley Fluid may be applied by submersing trolleys in a heated fluid tank at temperatures up to 85°C (185°F), by brush or drip feed, or by a centralized lubrication system.

For the lubrication of chain and conveyor systems requiring a higher viscosity fluid, PURITY FG Chain Fluid Light or Chain Fluid Heavy is recommended, reference IM-7896 Tech Data.

Typical Performance Data

PROPERTY	ASTM TEST METHOD	RESULTS
Viscosity, cSt @ 40°C (SUS @ 100°F) cSt @100°C (SUS @ 210°F)	ASTM D445	43.7 (224) 7.31 (50.4)
Viscosity Index	ASTM D2270	131
Pour point, °C (°F)	ASTM D5950	-15 (5)
Flash point, COC, °C (°F)	ASTM D92	215 (419)
Colour	ASTM D1500	<0.5
Total acid number, mg KOH/g	ASTM D664	11
Water Separability at 54°C (129°F), mL fluid-water-emulsion (minutes to separation)	ASTM D1401	40-40-0 (10)
Wear Protection, four-ball wear, scar diameter, mm	ASTM D4172	0.45
Extreme Pressure Protection, four-ball weld load, kg (lb)	ASTM D2783	126 (278)
Rust Protection, A – distilled water B – synthetic sea water	ASTM D665	Pass Pass
Foaming Resistance, Sequence I Sequence II Sequence III	ASTM D892	10 / 0 60 / 0 20 / 0

The values quoted above are typical of normal production. They do not constitute a specification.

Shelf Life: Product shelf life is 1 year from the date of manufacture when stored in sealed containers under protected storage conditions*.

* Protected storage conditions includes indoor or covered storage, protected from contamination including exposure to rain and snow, exposure to direct sunlight, exposure to extreme temperatures and high / low temperatures cycles.

Health and Safety

To obtain Material Health and Safety Data Sheets, contact one of Petro-Canada's TechData Info Lines.

TechData Info Lines

If you are an **existing customer** looking to place an order, please call a Customer Order Management Representative at:

Canada (English) Phone 1-800-268-5850
(French) Phone 1-800-576-1686
United States Phone 1-877-730-2369
Latin America/Europe/Asia Phone +1-866-957-4444

You can also e-mail us at lubecsr@suncor.com



If you would like to **become a Petro-Canada lubricants customer** and require more information about specialty fluids, oils and greases that can help maximize your equipment performance, savings and productivity, please contact us at:

North America Phone 1-866-335-3369
Europe Phone +44 (0) 121-781-7264
Germany Phone 0800-589-4751
China Phone +86 (21) 6362-0066

Visit us on the web at lubricants.petro-canada.com